



**深圳市神牛摄影器材有限公司**

地址: 深圳市宝安区福海街道塘尾社区耀川工业区厂房2栋  
电话: 0755-29609320(8062) 传真: 0755-25723423 邮箱: godox@godox.com

**GODOX Photo Equipment Co., Ltd.**

Add: Building 2, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen, China Tel: +86-755-29609320(8062) Fax: +86-755-25723423 E-mail: godox@godox.com

godox.com

Made in China



Godox

LED摄影灯  
LED VIDEO LIGHT

LED1000D II LED1000E II



使用手册  
Instruction Manual

## 九、产品参数

LED灯	白光版LED1000D II	双色温版LED1000Bi II
锂电池供电	14.8V锂电池 (BP-L接口) (需另购)	
DC电源供电	13~16.8V	
频道	16个	
组别	6组 (A, B, C, D, E, F)	
功率	最大70W	
色温	5600K±300K	3300K~5600K ±300K
100%光照度 (LUX) (≈)	5400(1米)	4800 (1米/4200K) 2200 (1米/3300K) 2600 (1米/5600K)
CRI(≈)	96	
TLCI(≈)	98	
调光范围	0%~100%	
灯珠数量	1024个	5600K: 512个 3300K: 512个
工作环境温度	-10~40度	
产品尺寸	430*460*100mm	
净重	2.51kg	

设计和规格如有变更, 恕不另行通知。

## Foreword

Thank you for purchasing this Godox product!

This LED1000 II video light is excellent for product shooting, photojournalistic and video recording, etc. It provides a wide spectrum, beautifully soft and even illumination for photography. Two models are available: LED1000D II Daylight Version (5600K), and LED1000Bi II Bicolor Version (3300K~5600K).

Features:



- 1024-LED-bulbs panel is lithium-ion or DC powered
- Wirelessly adjust brightness or color temperature
- Large-sized LCD panel. Settings auto saved.

Type	Model
Daylight Version(Color Temperature 5600K)	LED1000D II
Bicolor Version(Color Temperature 3300K~5600K)	LED1000Bi II

## ⚠ Warning

- ⚠ Always keep this product dry. Do not use in rain or in damp conditions.
- ⚠ Do not disassemble. Should repairs become necessary, this product must be sent to an authorized maintenance center.
- ⚠ Keep out of reach of children.
- ⚠ As this product do not have waterproof function, please take measures of waterproof in rainy or damp environment.
- ⚠ Do not use or store the product if the ambient temperature reads over 50 °C.
- ⚠ Do not use the flash unit in the presence of flammable gases, chemicals and other similar materials. In certain circumstance, these materials may be sensitive to the strong light emitting from this flash unit and fire or electromagnetic interference may result.
- ⚠ **Observe precautions when handling batteries:**
  - Do not put batteries into a fire or apply direct heat to them.
  - Batteries are prone to leakage when fully discharged. To avoid damage to the product, be sure to remove batteries when the product is not used for a long time or when batteries run out of charge.
  - Should liquid from the batteries come into contact with skin or clothing, rinse immediately with fresh water.

# Parts

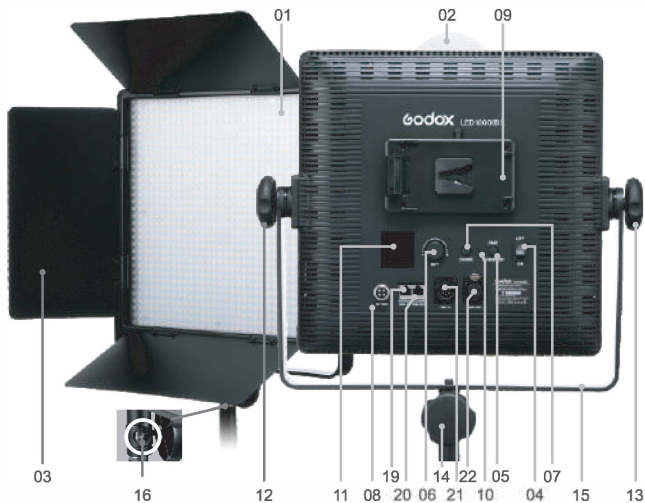

- 01. 1024 LED Beads
- 02. Color Filters
- 03. Reflector
- 04. ON/OFF Power Switch
- 05. RUN/STOP Button
- 06. Select Dial + SET Button
- 07. CH/GR Button
- 08. DC Power Jack


- 09. Lithium Battery Compartment
- 10. Power Indicator
- 11. LCD Panel (White in Black)
- 12. Knob A
- 13. Knob B
- 14. Knob C
- 15. Bracket

- 16. Bracket Mounting Hole
- 17. Power Adapter
- 18. Power Cord
- 19. DMX In
- 20. DMX Out
- 21. DMX512 Input Port
- 22. DMX512 Output Port

# Power Management

## 1. Power Supply

Two power supply modes are available:




- Using lithium battery: This light uses SONY BP-L model lithium battery (purchased separately).
- Using DC power jack: This light can be powered by DC power supply. Use a 13~16.8V adapter (included) to connect the light with the DC power jack (08).

### Note:

- When using lithium battery, the Battery Level Indicator is displayed on the LCD panel. When the indicator blinks, the lithium battery power is low. Please recharge it immediately before usage in order to avoid forceful auto off.

## 2. Installing Lithium Battery

- Turn the Power Switch (04) off.
- Target the socket of the lithium battery towards the "+" "-" contacts of the Battery Compartment (09). Push the battery in until it locks.
- Power the light on.
- After using the light, please power it off.



## Using the Video Light

- Screw the Knob C (14) to the highest point and install the light stand onto the Bracket Mounting Hole (16).
- Tighten the Knob C (14).



## Operation


### 1. Power Supply

- Insert lithium battery or connect the light with DC power supply. Switch the power on, the Power Indicator is on and the video light giving out light.




### 2. LED General Mode:

- in initial state, power the LED light on to enter LED general mode (long press the RUN/STOP button to switch LED general mode and DMX mode).



### 3. Light Brightness/Color Temperature Adjustment:

- Light Brightness Adjustment: turn the select dial on the body to adjust light brightness from 0% to 100%.
- Color Temperature Adjustment: short press the SET button and the color temperature value will be blinking. Then, turn the select dial to adjust color temperature from 3300K to 5600K.



Model	Color Temperature	Light Brightness Range
LED1000D II	5600K	0%~100%
LED1000Bi II	3300K/5600K	0%~100%
	3400K~5500K	25%~100%

### 4. Wireless Remote Control

This product has remote grouping and control function.

Up to 6 groups of LED light can be controlled. 16 channels are available with strong anti-interference capability.

Please set the channels and groups of LED video light to the same as those of remote control before usage.

#### Adjusting Channel/Group of the LED Video Light

- Press the CH/GR button and the group icon blinks. Turn the select dial to choose a group ID (A to F).
- Press the CH/GR button twice and the channel icon blinks. Turn the select dial to choose a channel ID (1 to 16).



**Note:** The wireless signal can be received only when the LED light is power on.

#### Other Operation Tips:

- Pressing the ON/OFF button on the remote control can turn on/off all the LED groups.
- Pressing the "SET" button on the remote control for 2 seconds can turn on/off the current LED group.
- The remote control will auto power off after four hours of idle operation.

#### Tips of Using Remote Control:

- (1)When using the Daylight Version LED1000D II, please set the color temperature of the remote control as 5600K constantly;
- (2)Please remove the battery if the light will not be used for an extended period of time.

#### 5. Replacing A Color Filter


- Pinch the edge of the color filter (02) and pull it out upwardly.
- Insert a new color filter in and push it downwardly. Then the color filter is securely in position.




## DMX Mode

#### 1. Choose DMX Mode

- In the initial state, hold down the RUN/STOP button and power the light on to enter DMX mode, and the brightness value and color temperature value will be displayed on the LCD panel.




- In LED general mode, long press the RUN/STOP button to enter DMX mode. In this way, the brightness value and color temperature value won't be displayed on the LCD panel.



#### 2. Set DMX Channel

- Press the SET button and the DMX channel will be blinking. Turn the select dial to set DMX from 1 to 512.



#### 3. Connect to Console

- Choose DMX port according to the model to be controlled. Each light will occupy two DMX channels and the light brightness or color temperature can be adjusted.

**Note: In DMX mode, the color temperature and light brightness can only be controlled by the console.**

## What's in the Box of LED1000II?

NO.	Included Item	LED1000D II	LED 1000Bi II
1	LED Video Light	1 PC	1 PC
2	Power Adapter	1 PC	1 PC
3	Power Cord	1 PC	1 PC
4	Diffusion Filter	1 PC	1 PC
5	Yellow Filter	1 PC	NO
6	Blue Filter	1 PC	NO



LED Video Light



Power Adapter



Power Cord

## Technical Data

LED1000II Video Light	Daylight Version LED1000D II	Bicolor Version LED1000Bi II
Lithium Battery	14.8V Lithium Battery(SONY BP-L model lithium battery) (sold separately)	
DC Power Supply	13~16.8V	
Channel	16	
Group	6 groups(A,B,C,D,E,F)	
Power	Max. 70W	
Color Temperature	5600K±300K	3300K~5600K ±300K
Brightness(LUX) (≈)	5400(1m)	4800 (1m/4200K)
		2200 (1m/3300K)
		2600 (1m/5600K)
CRI (≈)	96	
TLCI (≈)	98	
Light Brightness Range	0%~100%	
LED Beads Quantity	1024	5600K: 512
		3300K: 512
Operation Temperature	-10~40°C	
Dimension	430*460*100mm	
Net Weight	2.51kg	

\* Product design and specifications are subject to change without notice.

## FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### Warning

Operating frequency:433.05MHz – 434.79MHz (only receive)

### Declaration of Conformity

GODOX Photo Equipment Co.,Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states.For more information of DoC, Please click this web link:

[https://www.godox.com/DOC/Godox\\_LED1000DII\\_LED1000BiII\\_DOC.pdf](https://www.godox.com/DOC/Godox_LED1000DII_LED1000BiII_DOC.pdf)

The device complies with RF specifications when the device used at 0mm from your body.

## Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safekeep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
	Address	
Seller Information	Name	
	Contact Number	
	Address	
	Date of Sale	
Note:		

Note: This form shall be sealed by the seller.

### Applicable Products

The document applies to the products listed on the **Product Maintenance Information** (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

### Warranty Period

The warranty period of products and accessories is implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day (purchase date) when the product is bought for the first time. And the purchase date is considered as the date registered on the warranty card when buying the product.

### How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

### Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases: ①. The product or accessory has expired its warranty period; ②. Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc; ③. Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alteration, addition and detachment; ④. The original identifying information of product or accessory is modified, alternated, or removed; ⑤. No valid warranty card; ⑥. Breakage or damage caused by using illegally authorized, nonstandard or non-public released software; ⑦. Breakage or damage caused by force majeure or accident; ⑧. Breakage or damage that could not be attributed to the product itself. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

### Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following **Product Maintenance Information**:

Product Type	Name	Maintenance Period(month)	Warranty Service Type
Parts	Circuit Board	12	Customer sends the product to designated site
	Battery	3	Customer sends the product to designated site
	Electrical parts e.g. battery charger, power cord, sync cable, etc.	12	Customer sends the product to designated site
Other Items	Flash tube, modeling lamp, lamp body, lamp cover, locking device, package, etc.	No	Without warranty

Godox After-sale Service Call 0755-29609320-8062