







OIS) COLUMN SGS CE








# CONTENTS

About Guarda	03
Why Choose Us	04
PORTABLE SAFE	05
◆ TURN KNOB SERIES UL350 1/2 Hour	06
◆ SINGLE LATCH SERIES UL350 1/2 Hour	07
HOME/COMMERICAL SAFE	08
◆ STEEL RESIN SERIES UL350 2 Hour-	09
◆ STEEL RESIN SERIES UL350 1 Hour	10
◆ CABINET SERIES UL350 1 Hour	11
◆ FIRE & SECURITY SAFE SERIES UL350 1 Hour————————————————————————————————————	12
◆ MEDIA SERIES UL125 1 Hour	13
◆DRAWER SERIES JIS S1037 1 Hour	14
Fire/Waterproof Test	15
About Certification	17







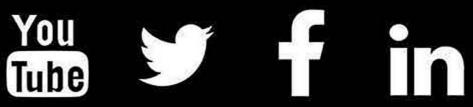



### **GUARDA Fire&Water Proof Safe, Founded in 1980**

Guarda is one of the largest OEM&ODM fire-proof safe manufacturer in the World. With strong demand overseas, Guarda invented and patented the fire insulation material in 1996 and developed a successful fire-proof chest that meet the stringent UL fire rating standards, exported under licence production with the BRINKS brand. With continuous innovation, Guarda has since design and manufactured a line of UL rated fire-proof water resistant chests, fire proof media safes, and the world's first poly shell cabinet style fire-proof water resistant safe.

### HISTORY



Guarda was Founded Launch of our by Mr.Leslie Chow, as an OEM & ODM manufacturer



manufacturing facilities, and adding UL/GB testing facilities the Patents in PRC



Developed new fireproof insulation formula and obtained



First portable Fire chest certified to UL350 30-minutes fireproof



First Fire Media chest certified to UL125 1-hour fireproof



Our quality management program is certified to ISO9001.







2000







Be of the member of China Security Association





Launch on to mainland China market





The third generation fire chest came out.Cooperated with the prestigious company-First alert, and sold more than 1 million unite per year.

2006



Developed the first plastic fireproof safe certified to UL350 1 hour in the world. Cooperated with the reputation company-Honeywell.

2005



First Fireproof drawer safe certified to JIS S1037, Rated 1 hour fireproof.

2014



First Fireproof safe certified to UL350 2-hour fireproof

2018



Our factory management program is certified to BSCI



# Why choose us?



More than 30 years in designing and manufacturing fire-proof safe



One-stop-shop for all your designing andmanufacturing needs



Commitment to quality in our product and service



**Professional** team in supporting your needs and wishes



Experience in working with overseas companies includingleading names in the industry













# PORTABLE SAFE

Keeping Small Valuables












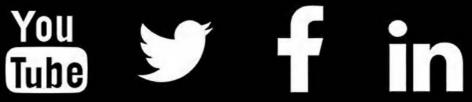

FOLLOWUS:







# URN KNOB SERIES





### Features:

- ◆ Fire protection:UL Fire rated 30 mins at 1550 °F/843°C, interior temperature remains below 350 °F/177°C
- ◆ Water protection: waterproof when even fully submerged
- Heavy duty carry-handle
- Digital media protection
- Three size portable fire&waterproof Chest safe can be fitted for different valuables.

Color:





#### SPECIFICATIONS.

Item	Model	External dimension WxDxH (mm)	Internal dimension WxDxH (mm)	N.W (KG)	Volume (L)	Use details	Lock Type
	2117	382x324x165	290x183x94	9.3	5	B5 size paper flat	
	2125	440x370x165	348x226x94	12.3	7.4	A4 and letter size paper flat	Tubular key
	2162	440x370x340	330x212x269	22	18.8	A4 and letter size hanging files	lock + Turn knob
Chardenin 20 Million	2117N	382x321.5x165	290x183x94	9.3	5	B5 size paper flat	
T & O & T	2125N	440x367.5x165	348x226x94	12.3	7.4	A4 and letter size paper flat	Combination lock with push button
Characterists (C. C. C	2162N	440x367.5x340	330x212x269	22	18.8	A4 and letter size hanging files	

The outer depth is given with the handle and the lock.




https://www.guardasafe.com



cs@guardasafe.com





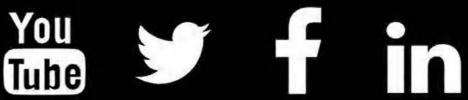



# SINGLE LATCH SERIES







### Features:

- ◆ Fire protection:UL Fire rated 30 mins at 1550 °F/843°C, interior temperature remains below 350 °F/177°C
- ♦ Water protection: waterproof when even fully submerged
- Heavy duty carry-handle
- Digital media protection
- Three size portable fire&waterproof Chest safe can be fitted for different valuables.

Color:






#### SDECIEICATIONS.

Item	Model	External dimension WxDxH (mm)	Internal dimension WxDxH (mm)	N.W (KG)	Volume (L)	Use details	Lock Type
	2013	354x282x154	288x181x94	6.5	4.9	B5 size paper flat	
	2017	407x321x155	338x218x93	8.2	6.9	A4 and letter size paper flat	S
1:	2030	407x322x214	312x218x144	11.3	9.8	A4 and letter size paper flat	key lock
	2037	407x321x329	309x209x261	15.4	16.8	A4 and letter size hanging files	
	2017D	407x322x174	338x218x93	8.2	6.9	A4 and letter size paper flat	
	2030D	407x322x233	312x218x144	11.3	9.8	A4 and letter size paper flat	key or Digital
	2037D	407x322x348	309x209x261	15.4	16.8	A4 and letter size hanging files	

The outer depth is given with the handle and the lock.




https://www.guardasafe.com







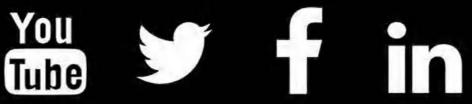



# HOME COMMERICAL SAFE








cs@guardasafe.com





FOLLOW US:

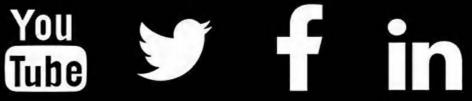



# STEEL RESINSERIES



### Features:

- ◆ Fire protection:UL Fire rated 60 mins at 1700 °F/927°C, interior temperature remains below 350 °F/177°C
- Water protection: waterproof when even fully submerged
- Steel exterior, resin interior
- Digital media protection
- Outdoor hinges
- Bolt-down feature, can be anchored to floor or wall
- Adjustable tray

Color:





### **SPECIFICATIONS:**

Item	Model	External dimension WxDxH (mm)	Internal dimension WxDxH (mm)	N.W (KG)	Volume (L)	Shelf	Lock Type
	4091RE1-BD	370x507x439	250.27x313.15x319.27	43.5	25.8	1	Key or Combination
(1) (2) (b) (2) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c	4091RE1K-BD	370x507x439	250.27x313.15x319.27	43.5	25.8	1	Key or Digital
	4091RE1T-BD	370x507x439	250.27x313.15x319.27	43.5	25.8	1	Key or Touchscreen Digital
	4091RE1LB-BD	370x507x439	250.27x313.15x319.27	43.5	25.8	1	Key or Fingerprint

The outer depth is given with the handle and the lock.



https://www.guardasafe.com



cs@guardasafe.com

















SPECIFICA	ATIONS:		c (UL) us _	<u> 202</u>	CC	UL1Hour	8Hours
Item	Model	External dimension WxDxH (mm)	Internal dimension WxDxH (mm)	N.W (KG)	Volume (L)	Shelf	Lock Type
	4175RE1-BD	461x538x528	340x343x407	73.5	49.6	1	Key or Combination
(1) (1) (2) (2) (3) (4) (4) (4) (4) (4) (4) (4) (4) (4) (4	4175RE1K-BD	461x538x528	340x343x407	73.5	49.6	1	Key or Digital
	4175RE1T-BD	461x538x528	340x343x407	73.5	49.6	1	Key or Touchscreen Digital
(Assertance)	4175RE1LB-BD	461x538x528	340x343x407	73.5	49.6	1	Key or Fingerprint
Faur date	4245RE1-BD	461x538x693	340x343x572	92.5	69.4	2	Key or Combination
(1) (2) (2) (3) (4) (3) (4) (4) (4) (4) (4) (4) (4) (4) (4) (4	4245RE1K-BD	461x538x693	340x343x572	92.5	69.4	2	Key or Digital
1 2 3 4 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	4245RE1T-BD	461x538x693	340x343x572	92.5	69.4	2	Key or Touchscreen Digital
Trace date.	4245RE1LB-BD	461x538x693	340x343x572	92.5	69.4	2	Key or Fingerprint

The outer depth is given with the handle and the lock.












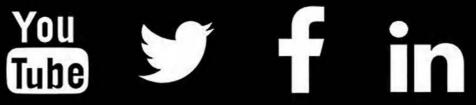



# STEEL RESIN SERIES



### Features:

- ◆ Fire protection:UL Fire rated 120 mins at 1850 °F/1010°C, interior temperature remains below 350 °F/177°C
- ◆ Water protection: waterproof when even fully submerged
- ♦ Steel exterior, resin interior
- ◆ Digital media protection
- Concealed hinges
- ♦ Bolt-down feature, can be anchored to floor or wall
- Adjustable tray






#### **SPECIFICATIONS:**

Item	Model	External dimension WxDxH (mm)	Internal dimension WxDxH (mm)	N.W (KG)	Volume (L)	Shelf	Lock Type
	3091S-BD	370x530x450	256x310x325	49.5	25.8	1	\$ 0 00 E
	3175S-BD	461x565x528	340x343x407	80	48.5	1	Key or
	3245S-BD	461x565x693	340x343x572	97	69.4	2	Combination
Control Control	3091SK-BD	370x524x450	256x310x325	49.5	25.8	1	
(Characteristics) (A) (Characteristics) (A) (Characteristics) (A) (Characteristics) (A) (Characteristics) (A) (Characteristics)	3175SK-BD	461x559x528	340x343x407	80	48.5	1	Key or
	3245SK-BD	461x559x693	340x343x572	97	69.4	2	Digital
	3091ST-BD	370x524x450	256x310x325	49.5	25.8	1	
Characterist (Characterist (Ch	3175ST-BD	461x559x528	340x343x407	80	48.5	1	Key or
	3245ST-BD	461x559x693	340x343x572	97	69.4	2	Touchscree Digital
	3091SLB-BD	370x524x450	256x310x325	49.5	25.8	1	
	3175SLB-BD	461x559x528	340x343x407	80	48.5	1	Key or
	3245SLB-BD	461x559x693	340x343x572	97	69.4	2	Fingerprint

The outer depth is given with the handle and the lock.



https://www.guardasafe.com













# CABINET SERIES

50 1 Hour




SGS CE

### Features:

- ◆ Fire protection:UL Fire rated 60 mins at 1700 °F/927°C, interior temperature remains below 350 °F/177°C
- ♦ Water protection: waterproof when even fully submerged
- Digital media protection
- Concealed hinges
- Bolt-down feature, can be anchored to floor or wall
- ◆ Adjustable tray

Color:





#### SPECIFICATIONS:

Item	Model	External dimension WxDxH (mm)	Internal dimension WxDxH (mm)	N.W (KG)	Volume (L)	Shelf	File Rac	
	2087	373x486x432	256x300x325	34	25	1	0	
	2092	450.2x491x458	333x305x351	41.7	35.6	2	0	Key or
	2096	450.2x591x610	334x342x494	61	56.5	2	1	Combination
	2087D	373x486x432	256x300x325	34	25	1	0	
	2092D	450.2x491x458	333x305x351	41.7	35.6	2	0	Key or
	2096D	450.2x591x610	334x342x494	61	56.5	2	1	Electronic digital
	2087LB	373x486x432	256x300x325	34	25	1	0	(1)
	2092LB	450.2x491x458	333x305x351	41.7	35.6	2	0	Key or
	2096LB	450.2x591x610	334x342x494	61	56.5	2	r:	Biometric fingerprint

The outer depth is given with the handle and the lock.



https://www.guardasafe.com

+86 20 3887 8130

cs@guardasafe.com





FOLLOW US:







### FIRE & SECURITY

## SAFE SERIES

### Features:







- ◆ Meet UL-72 Class 350 1-Hour fire endurance testing using patented insulation technology
- ◆ Meet GB Grade A 15 minute anti-burglary standard(TL-15 equivalent)
- ◆ Touchscreen Digital lock with OLED display Patented mechatronic emergency overried lock with no
- ◆ Keyway enhances theft protection
- Contact for back up battery opening
- ◆ Bolt-down device while maintaining fire capability
- ◆ Adjustable shelves for storage organization









#### **SPECIFICATIONS:**

Item	Model	External dimension WxDxH (mm)	Internal dimension WxDxH (mm)	N.W (KG)	Volume (L)	Shelf	Lock Type
	5310	500x560x690	366x373x556	175	75.9	1	Key or Digital

The outer depth is given with the handle and the lock.



https://www.guardasafe.com



+86 20 3887 8130


cs@guardasafe.com






FOLLOW US:



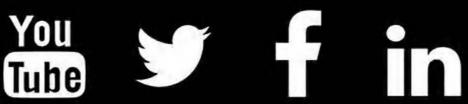



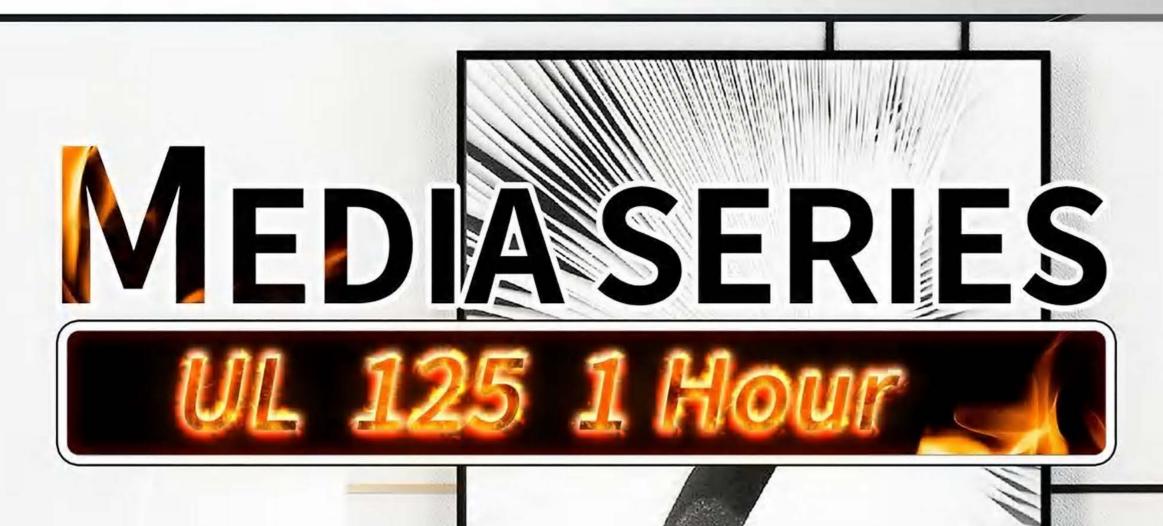

### Features:

- ◆ UL-72 Class 125 Fire Rated 60 minutes at 1700 °F/927°C, interior temperature remains below 125°F/52°C
- Media protection including hard drives and negatives
- Single latch design with key lock
- Waterproof even when fully submerged
- ♦ Handy push cart available
- ♦ Heavy-duty rails











uuarda盾牌




ltem	Model	External dimension WxDxH (mm)	Internal dimension WxDxH (mm)	N.W (KG)	Volume (L)	Shelf	Lock Type
	2040	407x321x329	212x126x146	27.2	3.9		Key lock

The outer depth is given with the handle and the lock.



https://www.guardasafe.com












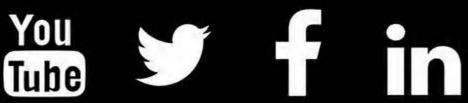



# DRAWER SERIES

### Features:



- ◆ Fire protection:JIS S 1037 Fire rated 60 mins at 1700 °F/927°C, interior temperature remains below 350 °F/177°C
- Digital media protection
- Drawer style design and can be fitted into closets
- ♦ Heavy-duty rails
- ◆ Barrel key lock



0

0









### **SPECIFICATIONS:**


Item	Model	External dimension WxDxH (mm)	Internal dimension WxDxH (mm)	N.W (KG)	Volume (L)	Shelf	Lock Type
	2091D	540x510x260	414x340x121	36.5	17.1	0	Key or Digital

The outer depth is given with the handle and the lock.



https://www.guardasafe.com












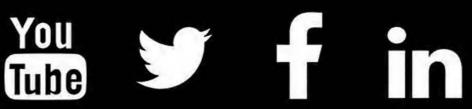



# Guarda Security Cash Box



#### **SPECIFICATIONS:**


Item	Model	External dimension WxDxH (mm)	Internal dimension WxDxH (mm)	N.W (KG)	Volume (L)	Description
<b>5</b>	CB10	171x70x171	168x57x168	0.8	1.6	*Made from durable powder coated steel  *Two-in-one use with a 4-slot cash tray or 10-key hanging key box  *10 key ring tags included  *Keylock with two keys
	CB20	279x203x111	276 x191x102	1.2	5.4	*Made from durable powder coated steel  *Removable 7 compartment cash tray  *Convenient carry handle  *Keylock with two keys
	CB26	289x203x87	287x191x76	2.0	4.2	*Made from durable powder coated steel  *Removable 7 compartment cash tray  *4 spring loaded money clips  *Convenient carry handle  *Keylock with two keys
	CB31	322x216x102	287x191x86	2.1	4.7	*Made from durable powder coated steel  *Double steel wall construction  *Interior floor lining  *Convenient carry handle  *Keylock with two keys
	CB50	343x152x267	340x146x241	1.9	12.0	*Made from durable powder coated steel  *Hangs letter size hanging folders  *Convenient carry handle  *Keylock with two keys
ANN	CB60	200x83x292	191x76x289	1.6	4.2	*Made from durable powder coated steel *28 key hook with rings and tags included *Wall mounting hardware included *Handy opening handle *Keylock with two keys
	CB35	324x264x137	298x227x111	2.97	7.6	*Made from durable powder coated steel  *Convenient carry handle  *Digital code lock with two keys
	CB40	450x320x130	420x290x110	6.6	13	*Made from durable powder coated steel  *Convenient carry handle  *Digital code lock with two keys

The outer depth is given with the handle and the lock.



FOLLOWUS:



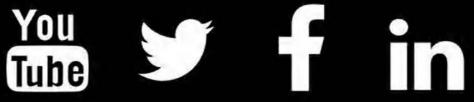




### Fire endurance test by UL-72

#### Part 1: What's the UL-72 standard, and how to choose a appropriate fire safe?

The UL-72 standard distinguishes fireproof products by their internal temperature limits and burn time, and the internal temperature of the product must not exceed a specified temperature for a given burn time, as follows:

Classifications	Interior Temperature Limit	Fire Rating		
Class 350	350°F (177°C)	4,3,2,1 or 1/2 h		
Class 150	150°F (66°C)	4,3,2,1 or 1/2 h		
Class 125	<b>125°</b> F ( <b>52°</b> C)	4,3,2,1 or 1/2 h		

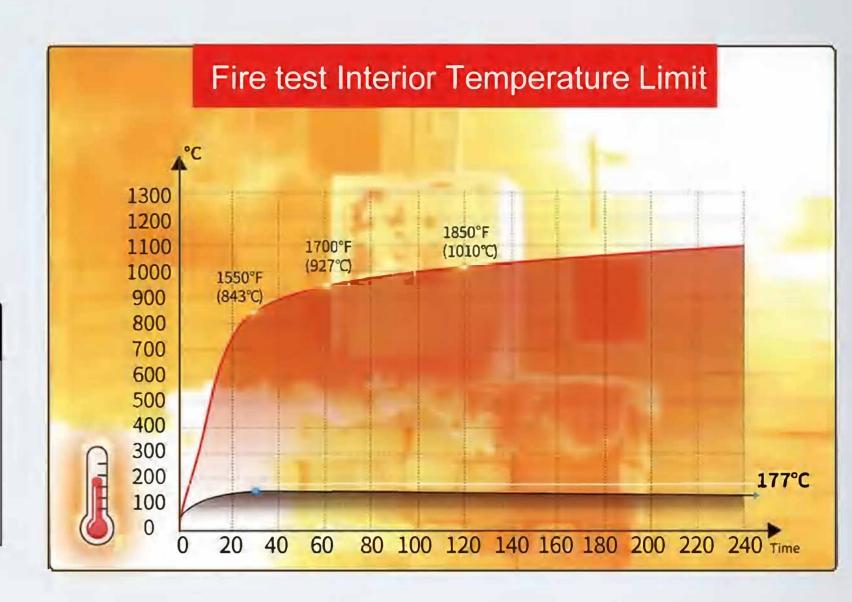


In addition, for Class 150 & Class 125 the interior relative humidities of 85% and 80%, respectively, cannot exceed when the device is exposed to the standard test fire and during the cooling period following the standard test fire.

According to the UL-72 standard ,items like paper records and other valuable documents,may be kept in a Class 350 Fire safe. Data cartridges, audio/video cassettes, floppy discs, film or photo negatives may be kept in a Class 150/125 Fire safe.

To protect what matters most, choose the appropriate Fire Safe from the Guarda safe series:

	Fire Rating	Series		
Class 350	2 h	Steel Resin Series		
Class 350	1 h	Cabinet Series/Fire & Security Series		
Class 350	1/2 h	Turn Knob Series & Single Latch Series		
Class 125	1 h	Digital Media Series		



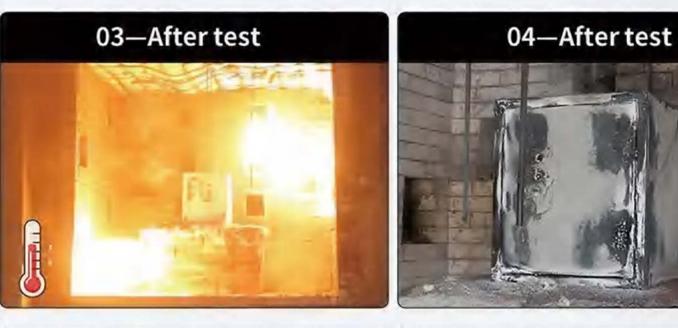





# R37947 RECORD PROTECTION EQUIPMENT AS TO FIRE RESISTANCE RATING: CLASS 350 1/2 HR.& CLASS 177-1/2HR. NO. F4 9 0 4 8 4 8 0

#### Part 2: How to easily identify a UL-72 certified fire safe?

All standard products that have passed the UL fire test and classified have a certification label issued by the Underwriters Laboratories inside the product. The label contains the file number, fire rating, as well as serial number. If in doubt about the standard of the product, you can check via the website: www.ul.com directly.



### Waterproof test by SGS

### Part 1: How waterproof safe are tested?

Guarda safes not only meet the stringent UL standard for fireproof, but also the waterproof test verified by SGS. Within the time limit of the water resistant test, there should be no visual ingress of water.

Series	Time	Submerged depth under water	
Cabinet Series/Steel Resin Series	8h	50 mm	
Turn Knob Series	24h	1 m	
Single Latch Series	72h	1 m	





In case of a fire/water accident, digital media, back-ups, documents, photos ect. will be safe in a quality Guarda safe.





# Certification

Series	Fire Rating/Hr	Standards	Organization	Waterproof	Organization	Other Certification
Turn Knob Series	1/2 H	UL72 Class 350	UL	24 hours up to 1m water	SGS	ROHS
Single Latch Series	1/2 H	UL72 Class 350	UL	72 hours up to 1m water	SGS	CE
Cabinet Series	1 H	UL72 Class 350	UL	8 hours up to 50mm water	SGS	CE
Steel Resin Series	1 H	UL72 Class 350	UL	8 hours up to 50mm water	SGS	CE
Steel Resin Series	2 H	UL72 Class 350	UL	8 hours up to 50mm water	SGS	CE
Digital Media Series	1 H	UL72 Class 125	UL	8 hours up to 50mm water	Factory Test	
Drawer Series	1 H	JIS S 1037	JIS			







### CONTACTS

#### HONG KONG OFFICE:

- www.guardasafe.com
- +852 2340 0231
- No.8, 2/F, Sunray Industrial Center 610 Cha Kwo Ling Road Yau Tong, Kowloon HONG KONG

#### CHINA OFFICE: Guarda Safe Industrial Limited

- www.guardasafe.com
- + 86 20 3887 8130
- Room 1608, Southern Securities House 148 Tiyu Dong Road Tianhe, Guanghzou CHINA

#### **MANUFACTURING**

- www.guardasafe.com
- +86 20 8486 0094
- O No. 188 Li Jiang Road, Shilouzhen, Panyu, Guangzhou CHINA