
Godox

THEODIST LTD
BUSINESS SUPERSTORE

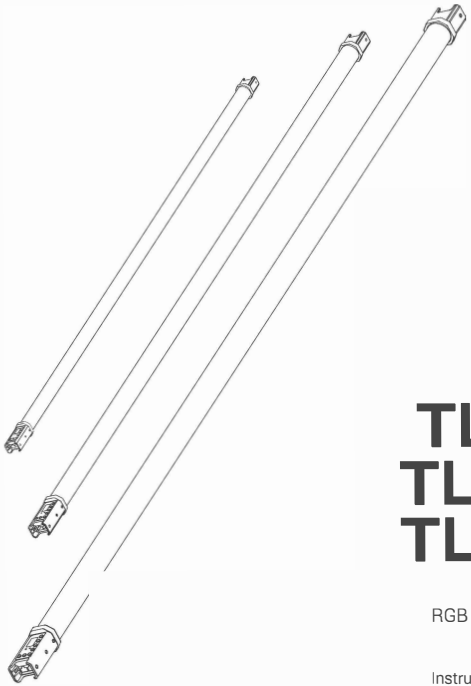

TL60
TL120
TL180

RGB 条灯

RGB Tube Light

使用手册

Instruction Manual

Safety Instructions and Attentions

First of all, as the most basic principle: This product is a professional lighting set equipment and should be used by professional lighting engineers or under the guidance of professionals. Basic safety attentions must always be followed during use, as follows:

Before use, please read and understand these instructions and attentions.

1. Professional lighting is prohibited for children. When children are near, parents or
2. accompanying persons must supervise closely to prevent children from personal injury due to collision with lamps or private use of lamps.

This lighting product is not ordinary lighting product and cannot be used for general

3. lighting. Anyone who has suffered eye damage or has sensitive eyes should avoid using this product.

When the lamp is on, it must be used with care. Do not touch high-temperature parts,

4. such as LED lamp beads, to avoid burns.

When the lamp is on, it is forbidden to look directly at the lamp beads under any

5. circumstances. Strong light should be used under the guidance of professional lighting engineers. Avoid prolonged exposure to strong light under any circumstances. If eye discomfort, please turn off the lamp in time, suspend use, and see a doctor immediately.

If the lamp bead is damaged or deformed by heat, stop using this equipment, and

6. contact the manufacturer, service agent or qualified maintenance personnel to replace the lamp bead in time to avoid accidents.

This product is only suitable for use in -10℃ to 40℃ operating environment and

7. normal humidity environment.

Do not use damaged equipment or accessories, and wait for professional maintenance

8. personnel to check and repair to confirm being normal before use.

During using, if the casing of this product is broken due to being dropped, squeezed

9. or subjected to strong impact, please do not use it, so as to avoid electric shock injury due to contact with internal electronic components.

If an extension cord is required, please use an extension cord with a current rating

10. greater than or equal to that of the equipment. If an extension cord is rated less than the equipment, overheating may result.

Some products have long power cords, please place the power cords properly and

11. keep them in a safe place. Avoid contacting the power cord with overheating surfaces, avoid improper placement that could cause pulling damage, or trip on-site personnel. Please use the certified power cord from the original manufacturer. If the product is damaged by using a non-certified power cord, it will not be repaired by our factory.

THEODIST
BUSINESS SUPERSTORE

12. Be sure to unplug equipment from the power outlet before cleaning and repairing. When not in use, do not pull the power cord to unplug the equipment. For normal power-off, please hold both ends of the plug of the equipment with your hands and pull the plug out of power outlet. This equipment needs to be connected to a grounded outlet.
13. This equipment is not waterproof, please keep it dry and do not immerse it in water or other liquids. The equipment should be installed in a dry and ventilated place, and avoid using it in rainy, humid, dusty or overheated environments. Do not place any objects on the lamp or let liquid flow into the lamp to avoid accidents.
14. Do not disassemble the product without permission. If the product fails, it must be checked and repaired by authorized maintenance personnel.
15. Before storing, make sure that the equipment has cooled down completely. For storage, unplug the power cord from the equipment. The equipment should be placed in the carrying case or in a ventilated dry place.
16. Do not place equipment near flammable and volatile solvents such as alcohol and gasoline.
17. Do not use accessories that are not recommended by our factory to avoid fire, electric shock or personal injury.
18. When cleaning, do not wipe it with a damp cloth, please use a dry cloth or a soft cloth to wipe the dirt of the equipment.
19. Please take off the protective cover before using.
20. This product complies with ROHS,CE,and FCC certification, please refer to the relevant national standards for use and operation.
21. The safety instructions are formulated according to the strict testing of the factory, and the design and specifications of the equipment are subject to change without prior notice. For latest product information, please check the GODOX website and view latest electronic instruction.
22. Some products have built-in lithium batteries. Please use specified chargers, and use them within a proper range of the specified voltage and temperature according to the correct operating instructions.
23. Some products are battery powered. Do not use any batteries, power sources or accessories not specified in the instructions for such products. Keep batteries and other accessories out of the reach of children and infants. In the instance that a child or infant swallows a battery or accessory, immediate emergency medical attention is required. If the battery leaks, becomes discolored, deformed, emits smoke, or emits an abnormal odor, remove it immediately. Be careful during removal to avoid burns. Continued use could result in fire, electric shock, or burns. Do not use any deformed or modified batteries. Do not disassemble or modify this product or battery. Do not heat

THEODIST
BUSINESS SUPERSTORE

or solder the battery. Keep the battery away from fire or water. Do not incorrectly insert the positive and negative ends of batteries, or mix old and new batteries or batteries of different types together.

24. One-year warranty period, accessories such as consumable batteries, adapters, power cords, etc. are not covered by this warranty.
25. If it is found that the equipment is repaired without authorization, the one-year warranty period will be cancelled and relevant fees will be charged for maintenance.
26. Machine failures caused by non-standard operation are not covered by the warranty.

keep these instructions!

THEDIST.com
BUSINESS SUPERSTORE

Foreword

Thank you for purchasing this Godox Product!
This TL series RGB Lights are brandnew multifunctional RGB lights with dual color temperature and high light brightness. Suitable for almost all shooting occasions e.g. live streaming, portrait shooting, wedding, etc. It's portable and easy to be operated with various control methods.

Features


- Freely switch LED Bi-color mode, RGB mode and 39 special effects modes
- Easy to adjust color temperature, brightness, hue and color saturation
- Change colors with the rhythm of music
- Control by smartphone APP/2.4G wireless/DMX
- Use in combination to make more creative light groups

Warning

⚠ Always keep this product dry. Do not use in rain or in damp conditions.
⚠ Do not disassemble. Should repairs become necessary, this product must be sent to an authorized maintenance center.
⚠ Keep out of reach of children.
⚠ As this product do not have waterproof function, please take measures of waterproof in rainy or damp environment.
⚠ Do not use the flash unit in the presence of flammable gases, chemicals and other similar materials. In certain circumstance, these materials may be sensitive to the strong light emitting from this flash unit and fire or electromagnetic interference may result.
⚠ As this product has built-in lithium battery, do not disassemble, impact, squeeze or put it into fire. If serious bulge occurs, please do not use. Do not use or store the product if the ambient temperature reads over 40°C. Please charge the product with included adapter and correctly operate it within the defined voltage and working temperate according to the instruction manual.

THEDIST.com
BUSINESS SUPERSTORE

Names of Parts

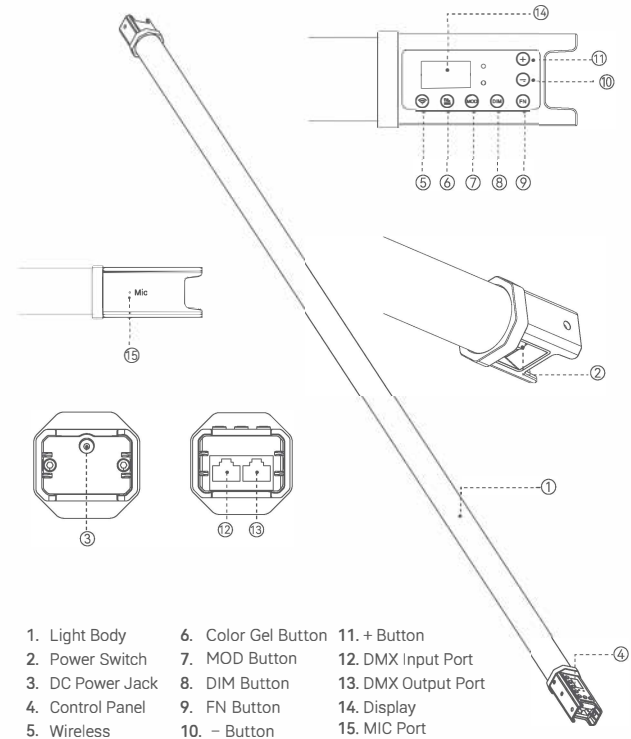

1. Light Body
2. Power Switch
3. DC Power Jack
4. Control Panel
5. Wireless Button
6. Color Gel Button
7. MOD Button
8. DIM Button
9. FN Button
10. – Button
11. + Button
12. DMX Input Port
13. DMX Output Port
14. Display
15. MIC Port

THEDIST.com
BUSINESS SUPERSTORE

What's in the Box

Model	Item List
TL60	Light Body*1, Adapter*1, Power Cord*1, RJ45 Cable*1, Clip*1, Steel Cable*2, Carry Bag*1, Instruction Manual*1
TL120	Light Body*1, Adapter*1, Power Cord*1, RJ45 Cable*1, Clip*2, Steel Cable*2, Carry Bag *1, Instruction Manual*1
TL180	Light Body*1, Adapter*1, Power Cord*1, RJ45 Cable*1, Clip*3, Steel Cable*2, Adapter Holder*1, Instruction Manual*1



Light Body



Power Cord



Adapter



RJ45 Cable



Clip for TL180



Clip for TL60/TL120



Steel Cable



Adapter Holder



Instruction Manual



Carry Bag for TL60



Carry Bag for TL120

Optional Accessories

TL60/L120:

Two-light Bracket Kit TL-B2, Four-light Bracket Kit TL-B4, Eight-light Bracket Kit TL-B8
Two-light Bracket Kit TLA-B2, Four-light Bracket Kit TLA-B4

TL180:

Two-light Bracket Kit TL180-B2, Four-light Bracket Kit TL180-B4

THEDIST.com
BUSINESS SUPERSTORE

What's in the Box

1. Power Supply

The built-in lithium battery can offer portable operation once got fully charged.
The light can also put into usage by connecting the adapter to power source.


2. Charge

The charge grids indicator will be blinking in charging while displaying full grids once got fully charged.

Operation

1. Power Switch

Use the power switch to control the on or off of the RGB tube light. Then, the current information will be displayed on the LCD panel.

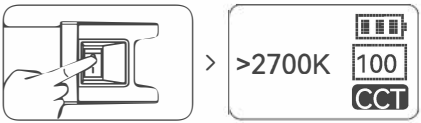

2. Mode Selection: Bi-color Mode/RGB Mode/Special Effects Mode

Press MOD button to switch different modes:



CCT displayed on the screen means Bi-color mode


HSI displayed on the screen means RGB mode

FX means special effects mode


2.1 Bi-color Mode

2.1.1 Color temperature adjustment: press the "+"or"-"button to adjust the color temperature from 2700K to 6500K.

THEODIST
BUSINESS SUPERSTORE




2.1.2 Brightness adjustment:Short press the DIM button, then, press the "+" or "-" button to adjust the brightness from 0 to 100.

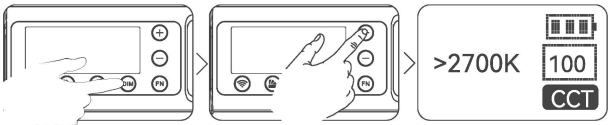


2.2 RGB Mode

2.2.1 Adjust hue H: Short press the FN Button and H is selected. Then, press the "+"or "-"button to adjust the hue from 0° to 360°.

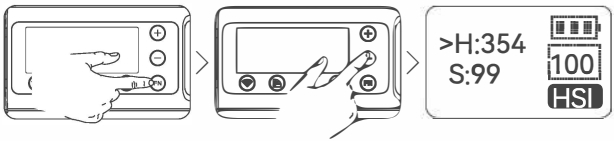


2.2.2 Adjust saturation S: Short press the FN Button dial and S is selected. Then, press the "+"or "-"button to adjust the saturation from 0 to 100.

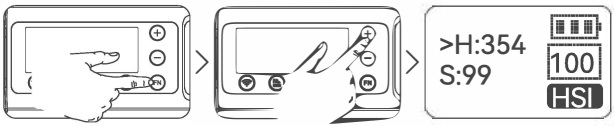


THE ODIST
BUSINESS SUPERSTORE

2.3 Special Effects Modes (39)

2.3.1 Press the "+" or "-"button to choose different special effects categories from 1 to 14. And the modes will display circularly by turning the select dial.



2.3.2 After choosing the current mode, Short press the FN Button to choose from I, II and III.

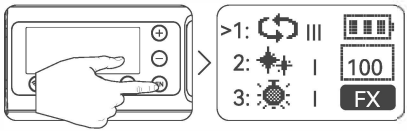

Light Effects Table (39)

No.	Display	Situation	Display I	Display II	Display III
1		RGB cycle	Slow speed	Medium speed	Quick speed
2		Flash	Flash	Press conference	Paparazzi
3		Party	Birthday party	KTV	Disco
4		Lightning	Discontinuous	Frequent	Sustainable
5		Broken bulb	Discontinuous	Frequent	Sustainable
6	TV	TV	Slow speed	Medium speed	Quick speed
7		Candle	Discontinuous	Frequent	Sustainable
8		Fire	Firewood	Campfire	Fire hazard
9		Firework	Brief	Continuous	Show
10		Police car	Strong flash	Frequent flash	Quick flash
11		Fire truck	Strong flash	Frequent flash	Quick flash
12		Ambulance	Strong flash	Frequent flash	Quick flash
13		Music	Music I	Music II	
14	SOS	sos			

THEODIST
BUSINESS SUPERSTORE

3. Control Modes Selection: Bluetooth/2.4G Wireless /DMX Control

Press the wireless button firstly, then, press the "+"or "-"button to choose the control mode. After choosing the mode, press the FN or wireless button to enter the relevant setting interface.




3.1 Bluetooth Setting

3.1.1 Bluetooth switch:Short press the FN button to select the Bluetooth. Then, press the "+"or "-" button to switch on or off. If"ON"is displayed, the Bluetooth is on and "OFF" means off. When the Bluetooth is on, the indicator will turn to blue.


3.1.2 Initialize the Bluetooth password: Short press the FN button to select RESET. Then, press the "+"or "-" button to reset the Bluetooth.

3.1.3 Bluetooth Number: MAC: xxxx is the Bluetooth number of this light.



3.2 2.4G Wireless Setting

With 2.4G wireless system, RGB tube light has remote grouping and control function. It is recommended to purchase RC-R9 remote control(optional) to achieve wireless control. Up to 6 groups of LED lights can be controlled. 32 channels and 99IDs are available with strong anti-interference capability.



3.2.1 2.4G Wireless switch: press the FN button to select ON/OFF. Then, press the "+"or "-"button to switch on or off 2.4G wireless. "ON"means 2.4G wireless is turned on(wireless indicator is lightened green), "OFF" means turned off(wireless indicator is put off).



THE DIST
BUSINESS SUPERSTORE

3.2.2 Chanel setting: press the FN button to select CH. Then, press the "+"or "-" button to select 32 channels from 1 to 32.
3.2.3 Group setting: press the FN button to select GR. Then, press the "+"or "-" button to select 6 groups from A to F.
3.2.4 ID setting: press the FN button to select ID. Then, press the "+"or "-"button to select 99 IDs from 1 to 99.

Note: When opening the Bluetooth and 2.4G simultaneously, the indicator will turn to cyan. Please make LED light's channel, group and ID to the same as remote control's. The RGB tube light can only receive wireless signals in powered-on status.

3.3 DMX Control Modes

3.3.1 Press FN button to choose L/F, then press"+" or "-" button to choose F(FOLLOW mode), the indicator will display blue.
3.3.2 Press FN button to choose MOD,then press"+" or "-"button to choose CCT-HSI 8bit or ULTIMATE 8bit.
3.3.3 After choosing MOD mode, press FN button to choose ADD from 001 to 512.
3.3.4 After set ADD, connect one end of the DMX cable to DMX output port of controller and the other end to DMX input port of the light.

THEODIST
BUSINESS SUPERSTORE

The data sent by controller in CCT-HSI 8Bit mode are as follows:

Mode	Name	Channel	Function	DMX value	Parameter
Mode 1	CCT-HSI 8bit	1	DIM adjustment	0-255	0-100%
		2	CCT adjustment	0-255	2700K-6500K
		3	Cross gradient	0-255	DMX value is 0: only output CCT. DMX value is255: only output HSI.
		4	HUE adjustment	0-255	0°-360°
		5	Saturation adjustment	0-255	0-100

The data sent by controller in ULTIMATE 8bit mode are as follows:

Mode	Name	Channel	Function	DMX value	Parameter
Mode 2	ULTIMATE 8bit	1	Mode selection	0-51	CCT mode
				52-103	HSI mode
				104-156	RGBW mode
				157-208	FX mode
				209-255	Filter mode
		2	DIM adjustment	0-255	0-100%
		3	Mode Parameter (refer to table below)		
		4			
		5			
		6			

THEODIST.com
BUSINESS SUPERSTORE

Mode	Channel	Function	DMX value	Parameter
CCT Mode Parameter	3	CCT selection	0-255	2700K-6500K
HSI Mode Parameter	3	HUE adjustment	0-255	0-360°
	4	Saturation adjustment	0-255	0-100
RGBW Mode Parameter	3	Red light adjustment	0-255	0-255
	4	Green light adjustment	0-255	0-255
	5	Blue light adjustment	0-255	0-255
	6	White light adjustment	0-255	0-255
FX Mode Parameter	3	Light effect type	0-18	RGB recycle
			19-36	Flash
			37-56	Party
			57-75	Lightning
			76-95	Broken Bulb
			96-113	TV
			114-133	Candle
			134-151	Fire
			152-170	Firework
			171-189	Police car
			190-208	Firetruck
			209-228	Ambulance
			229-247	Music
			248-255	SOS
	4	Light effect gear	0-85	I
			86-171	II
			172-255	III
Filter Mode Parameter	3	Filter selection	0-127	R filter
			128-255	L filter
	4	(L or R) Filter switch	0-255	Each 13 values refer to one filter.

THEODIST
BUSINESS SUPERSTORE

8bit

Brightness calculation

$$\text{DMX value} = \frac{\text{Brightness value}}{0.3921}$$

$$\text{Brightness value} = \text{DMX value} * 0.3921$$

Brightness calculation

$$\text{DMX 數值} = \frac{\text{CCT value} - 2700}{14.9}$$

$$\text{CCT value} = \text{DMX value} * 14.9 + 2700$$


3.4 DMX LEAD and FOLLOW mode

3.4.1 Press FN button to choose L/F, then press"+" or "-" button to choose L(LEAD mode).

3.4.2. Set other lights to F(follow mode)(No need to set ADD).

3.4.3. Connect the lights with RJ45 cable.

3.4.4. The lights in FOLLOW modes will automatically synchronize the light in LEAD mode.

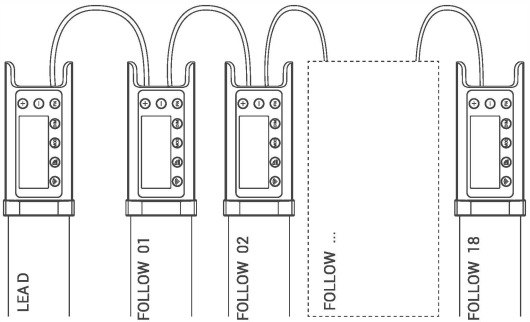


Note: When using LEAD and FOLLOW modes through DMX port, the quantity of lights in FOLLOW modes cannot be over 18.

THEODIST
BUSINESS SUPERSTORE

4. Color Gel Setting

Press the color gel button to enter the interface. Then, press the "+"or "-" button to choose R-Gel or L-Gel group. Then, press the FN to enter the color gel group to select the corresponding color gel. There are both 20 color gel in R-Gel and L-Gel groups for your choice, 40 kinds in total.

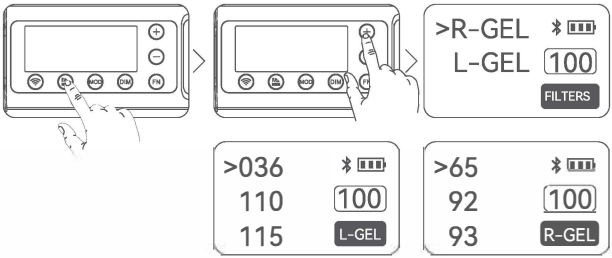

5. Connect with Smartphone APP

1. Set the Bluetooth to ON.
2. As there is a QR code on the light body please scan the QR code directly to download the "GodoxLight" smartphone APP(can be used by Android and Apple system).



For more smartphone APP operations, please open the "help" in APP to gain detailed guidance.

Note: The first mobile device (mobile phone or tablet) can directly use the APP to control the light body. When replacing other mobile devices (mobile phones or tablets), the lamp body can be connected normally after Bluetooth reset. RGBW mode is available in APP control of TL series tube lights.

Technical Data

LED Light	TL60	TL120	TL180
Built-in Lithium Battery	14.4V/2600mAh 37.44Wh	14.4V/5200mAh 74.88Wh	14.4V/9000mAh/ 129.6Wh
Adapter	20V/2.4A	20V/4.8A	20V/5.5A
Power	Max.18W	Max.30W	Max.55W
Duration(continuous output in 100% full power)≈	120 minutes	140 minutes	160 minutes
Channel	32		
Group	6 （A B C D E F）		
Color Temperature Range	2700K ~ 6500K		
Light Brightness Range	0%~100%		
RGB Color Gamut	0 ~ 360°		
CRI (≈)	96		
TLCI(≈)	98		
Control Method	Smartphone APP/2.4G wireless/DMX control		
Bluetooth Wireless Control Distance	≈30m		
2.4G Wireless Control Distance	≈50m(with optional RC-R9 remote control)		
Operation Temperature	-10~40 °C		
Dimension	48*750mm	48*1170mm	51*1800mm
Net Weight	0.73kg	1.27kg	2.21kg

* Product design and specifications are subject to change without notice.

THEODIST BUSINESS SUPERSTORE

Illuminance

TL60				
CCT	Illumination Unit	1m	2m	3m
2700K	lux	285	102	46.7
	fc	35.7	9.45	4.34
3200K	lux	384	102	46.8
	fc	35.6	9.44	4.35
4300K	lux	408	108	49.8
	fc	37.9	10.1	4.63
5600K	lux	421	111	50.8
	fc	39.1	10.3	4.72
6500K	lux	447	119	54.6
	fc	41.5	11.0	5.07

TL120				
CCT	Illumination Unit	1m	2m	3m
2800K	lux	659	202	101
	fc	61.2	18.8	9.4
3200K	lux	610	187	93.3
	fc	56.7	17.4	8.7
4300K	lux	666	205	102
	fc	61.9	19	9.5
5600K	lux	685	210	104
	fc	63.7	19.5	9.7
6500K	lux	769	234	117
	fc	71.3	21.7	10.9

THEODIST
BUSINESS SUPERSTORE

TL180				
CCT	Illumination Unit	1m	2m	3m
2700K	lux	776	253	145
	fc	72.1	23.5	13.5
3200K	lux	672	234	125
	fc	92.7	21.8	11.6
4300K	lux	687	240	128
	fc	63.8	22.3	11.9
5600K	lux	729	254	136
	fc	67.8	23.6	12.6
6500K	lux	895	312	167
	fc	83.2	29	15.5

* All the above tests are based on the condition of 100%brightness.

Maintenance

This product, except consumables e.g. adapter and adapter cable, is supported with a one-year warranty.
Avoid sudden impacts and the product should be dedusted regularly.
Maintenance of the flash must be performed by our authorized maintenance department which can provide original accessories.
Unauthorized service will void the warranty.
If the product had failures or was wetted, do not use it until it is repaired by professionals.
Changes made to the specifications or designs may not be reflected in this manual.

THEODIST.com
BUSINESS SUPERSTORE

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.

THEODIST.com
BUSINESS SUPERSTORE

⚠ Warning (TL180)

Operating frequency: 2412.99MHz – 2464.49MHz(2.4G only receive)/2402MHz – 2480MHz（BT） Maximum EIRP Power: 7.94dBm

Declaration of Conformity

GODOX Photo Equipment Co.,Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states.For more information of DoC, Please click this web link:
https://www.godox.com/eu-declaration-of-conformity/
The device complies with RF specifications when the device used at 0mm from your body.

⚠ Warning (TL60)

Operating frequency:2412.99MHz – 2464.49MHz(2.4G only receive)/2402MHz–2480MHz (BT)Maximum EIRP Power: 3.64dBm

Declaration of Conformity

GODOX Photo Equipment Co.,Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states.For more information of DoC, Please click this web link:
https://www.godox.com/eu-declaration-of-conformity/
The device complies with RF specifications when the device used at 0mm from your body.

⚠ Warning (TL120)

Operating frequency:2412.99MHz – 2464.49MHz(2.4G only receive)/2402MHz–2480MHz (BT) Maximum EIRP Power: 3.21dBm

Declaration of Conformity

GODOX Photo Equipment Co.,Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states.For more information of DoC, Please click this web link:
https://www.godox.com/eu-declaration-of-conformity/
specifications when the device used at 0mm from your body.

THE ODIST BUSINESS SUPERSTORE

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
	Address	
Seller Information	Name	
	Contact Number	
	Address	
	Date of Sale	
Note		

Note: This form shall be sealed by the seller.

Applicable Products

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

Warranty Period

The warranty period of products and accessories is implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day(purchase date) when the product is bought for the first time, And the purchase date is considered as the date registered onthe warranty card when buying the product.

How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

THEDIST.com
BUSINESS SUPERSTORE

Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases: ① . The product or accessory has expired its warranty period; ② .Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc; ③ . Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alternation, addition and detachment; ④ . The original identifying information of product or accessory is modified, alternated, or removed; ⑤ . No valid warranty card; ⑥ . Breakage or damage caused by using illegally authorized, nonstandard or non-public released software; ⑦ . Breakage or damage caused by force majeure or accident; ⑧ . Breakage or damage that could not be attributed to the product itself. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Product Type	Name	Maintenance Period(month)	Warranty Service Type
Parts	Circuit Board	12	Customer sends the product to designated site
	Battery	3	Customer sends the product to designated site
	Electrical parts e.g.battery charger	12	Customer sends the product to designated site
Other Items	Flash tube, modeling lamp, lamp body, lamp cover, lockingdevice, package,power cord, sync cable, etc.	No	Without warranty

THEODIST.com
BUSINESS SUPERSTORE

合格证
QC PASS

Wechat
Official Account
神牛微信公众号

深圳市神牛摄影器材有限公司

地址：深圳市宝安区福海街道塘尾社区耀川工业区厂房2栋 电话：0755-29609320(8062)
传真：0755-25723423 邮箱：godox@godox.com

GODOX Photo Equipment Co.,Ltd.

Add.:Building 2,Yaochuan Industrial Zone,Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103,China Tel:+86-755-29609320(8062) Fax:+86-755-25723423 E-mail:godox@godox.com

www.godox.com

Made in China | 705-TL1800-00